


# Jeti (DC-14) to Spirit Pro Setup

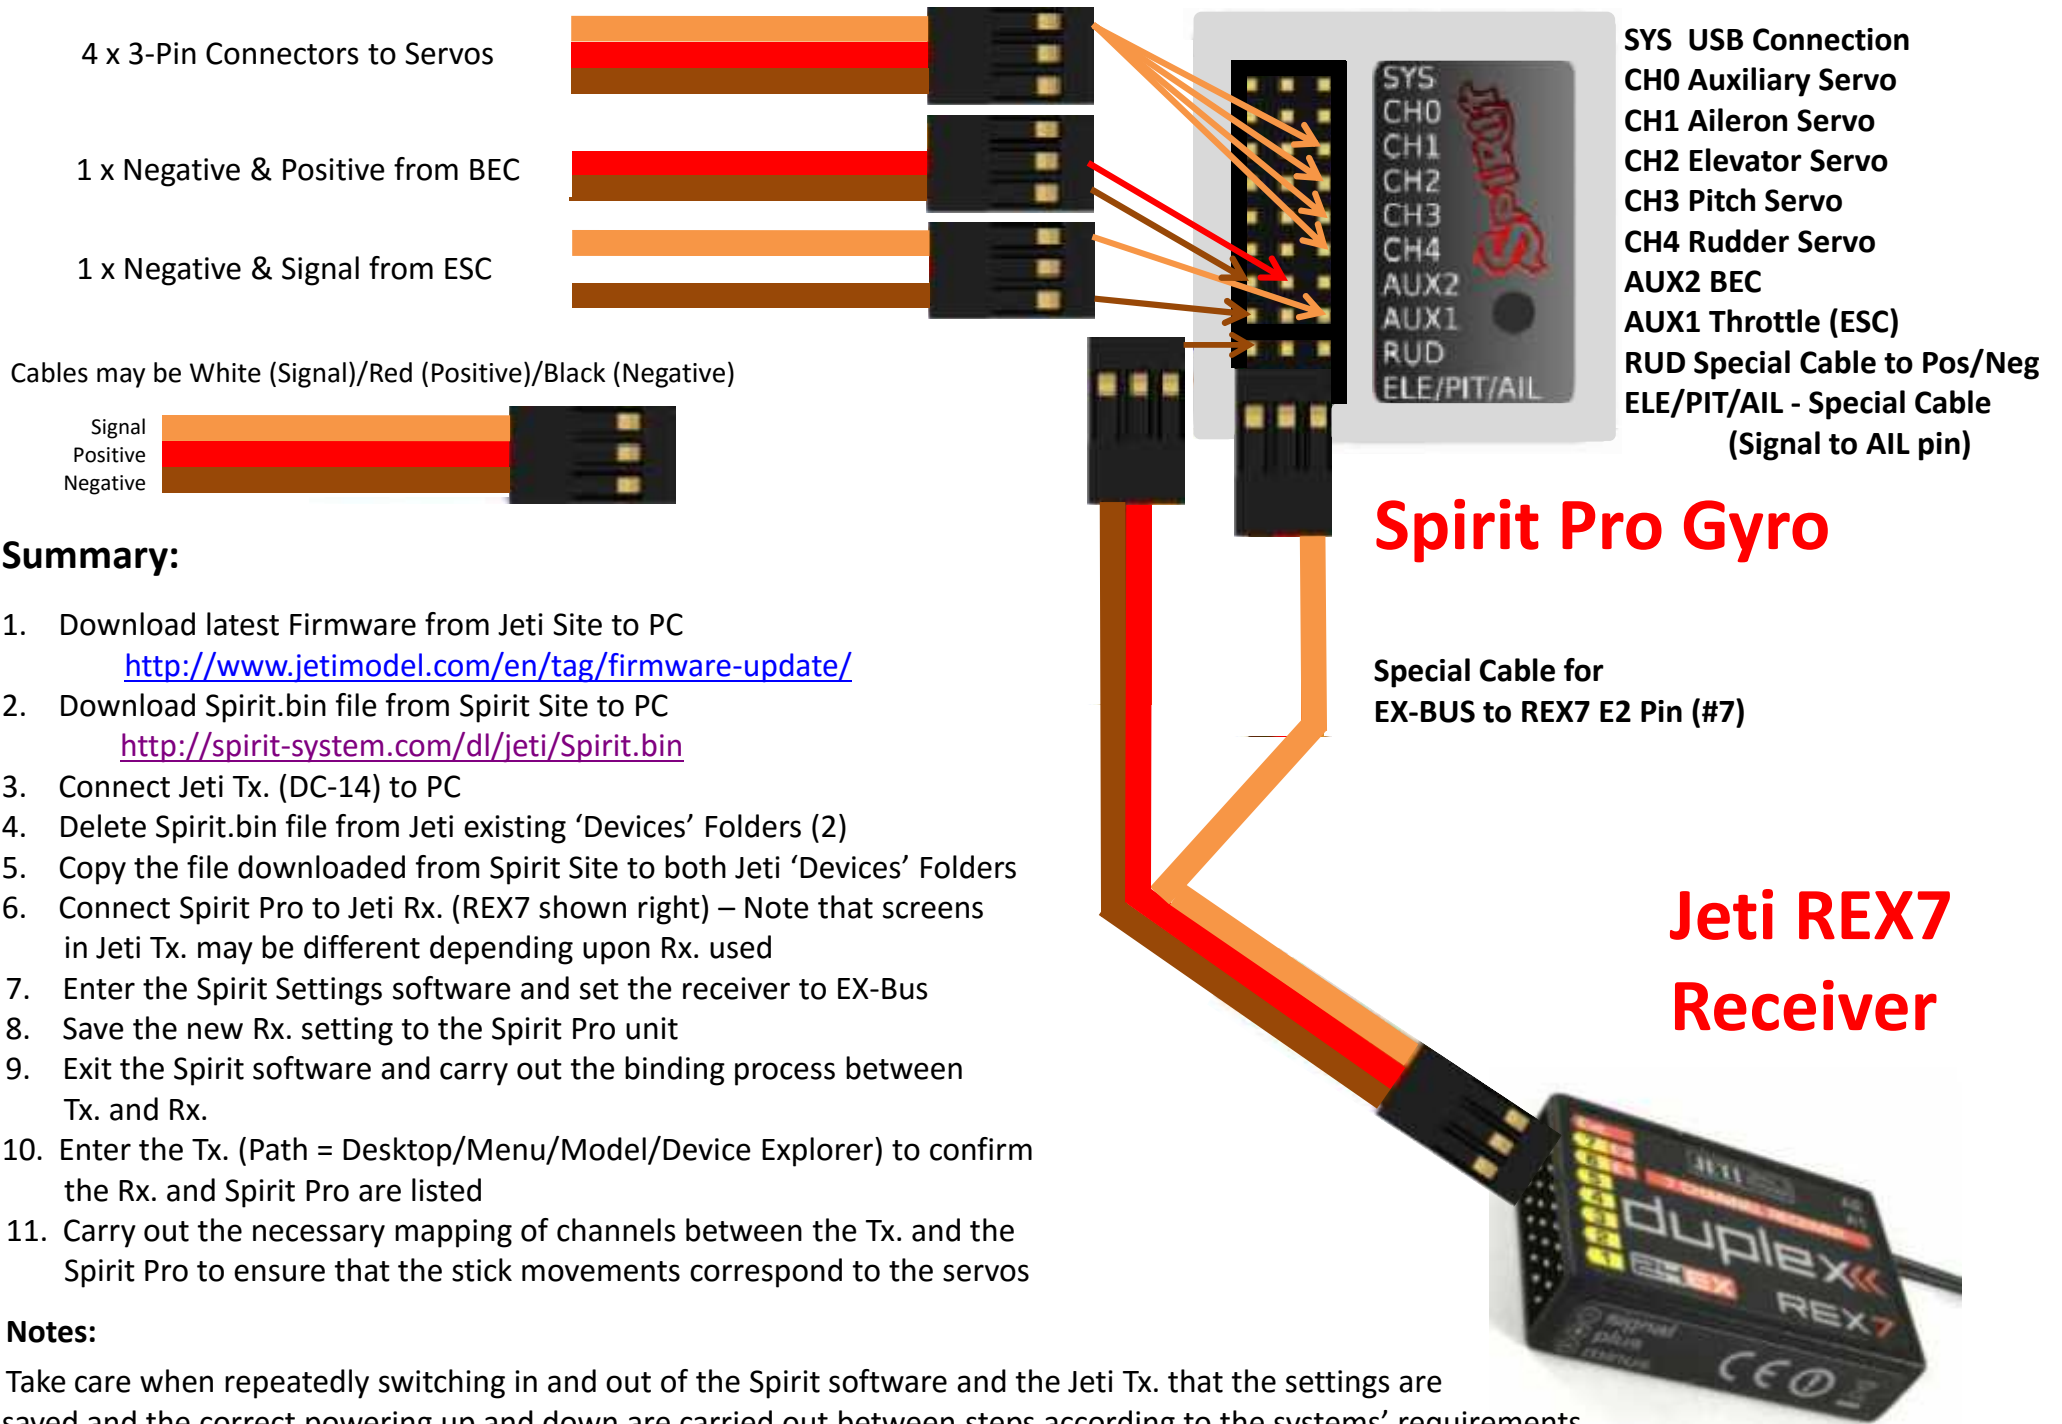

## Summary:

1. Download latest Firmware from Jeti Site to PC  
<http://www.jetimodel.com/en/tag/firmware-update/>
2. Download Spirit.bin file from Spirit Site to PC  
<http://spirit-system.com/dl/jeti/Spirit.bin>
3. Connect Jeti Tx. (DC-14) to PC
4. Delete Spirit.bin file from Jeti existing 'Devices' Folders (2)
5. Copy the file downloaded from Spirit Site to both Jeti 'Devices' Folders
6. Connect Spirit Pro to Jeti Rx. (REX7 shown right) – Note that screens in Jeti Tx. may be different depending upon Rx. used
7. Enter the Spirit Settings software and set the receiver to EX-Bus
8. Save the new Rx. setting to the Spirit Pro unit
9. Exit the Spirit software and carry out the binding process between Tx. and Rx.
10. Enter the Tx. (Path = Desktop/Menu/Model/Device Explorer) to confirm the Rx. and Spirit Pro are listed
11. Carry out the necessary mapping of channels between the Tx. and the Spirit Pro to ensure that the stick movements correspond to the servos

## Notes:

Take care when repeatedly switching in and out of the Spirit software and the Jeti Tx. that the settings are saved and the correct powering up and down are carried out between steps according to the systems' requirements.